


## Technical data

<b>Gas sensor</b>	<b>GG5:</b>	Single sensor
<b>Type of sensor</b>	<b>3:</b>	Sensor for the detection of hydrocarbonates, optimal for C <sub>1</sub> ...C <sub>8</sub> - hydrocarbonate, especially useable for stationary monitoring of Lower Explosive Limit (LEL)
<b>Chip</b>	<b>5:</b>	Size = (1.5 x 1.5) mm <sup>2</sup>
<b>Heater resistance at 0 °C</b>	<b>3:</b>	R <sub>H0</sub> = (10.0 ± 0.5) Ω
<b>Class of accuracy</b>	<b>0:</b>	R <sub>S0</sub> = ± 75 %, R <sub>S</sub> /R <sub>S0</sub> = ± 30 %
<b>Housing</b>	<b>T:</b>	Sensor in a TO39-housing with a stainless steel cap
<b>Dimensions</b>		
<b>Pin assignment</b>	Pin 1, 4 ... Heater; Pin 2, 3 ... Sensitive layer	
<b>Operating parameters</b>	Heater Temperature T <sub>H</sub> = (420 ± 15) °C Heater resistance R <sub>H</sub> = (25.4 ± 1.3) Ω Power rate P <sub>H</sub> ≈ 415 mW (Heater voltage U <sub>Hstat</sub> = 3.2 V)	
<b>Sensor parameters</b>	Basic resistance R <sub>S0</sub> = (150 ± 110) kΩ	
<b>Measurement voltage</b>	U <sub>S</sub> < 250 mV	
<b>Allowable storage and transportation temperature</b>	-25 °C ... +70 °C	
<b>Allowable storage and transportation humidity</b>	20 % ... 80 % relative humidity	
<b>Allowable storage conditions</b>	Storage environment free of any contaminations, particularly protected against chemical substances, such as Silicone etc.	
<b>Net weight</b>	ca. 0.35 g	
<b>Conformity</b>	2011/65/EU: Restriction of the use of Hazardous Substances Directive (RoHS)	

*R<sub>S</sub>... resistance sensitive layer, R<sub>H</sub>... heater resistance*

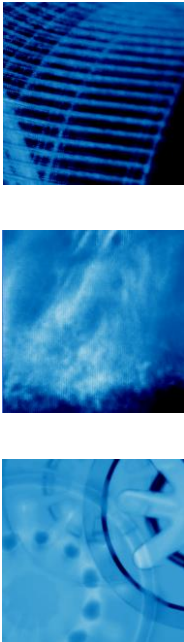

UST Umweltsensortechnik GmbH  
is certified according to



## Technical data

### Typical sensor characteristics to selected test gases

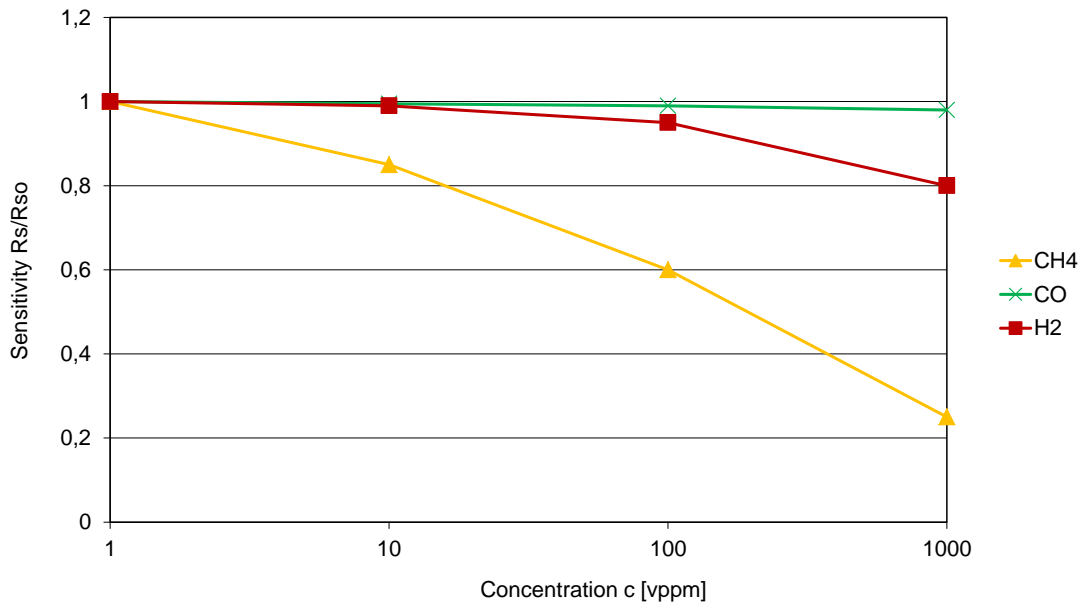


Figure 1: GGS 3530 T - Sensitivity characteristics on exposure to CH<sub>4</sub>, CO and H<sub>2</sub> (T<sub>H</sub> = 420 °C)


### Important remarks:

Improper transport, storage and application may cause damaging the gas sensor. Any contamination of the sensor must be avoided. The application, transport and storage environment has to be free of any contamination, particularly protected against chemical substances, e.g. silicones.

In particular directly contact with substances containing, silicones, sulfurous substances or non-desorbing inorganic components or contaminations (e.g. smoke, fumes, oils, greases or evaporating liquids) may cause damaging the sensor or to changes in the sensor resistance and/or in the sensor characteristics.

The mentioned values and data are recommended values which include the fault tolerances of measuring under diffusion conditions.

**Please ask us for customized solutions.**

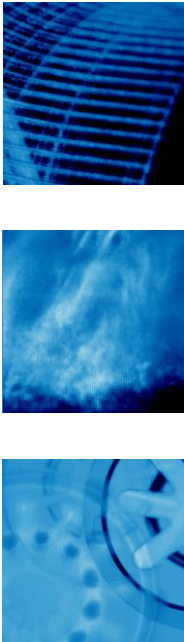

UST Umweltsensortechnik GmbH  
is certified according to

