


## Technical Data

Resistance at 0°C ( $R_0$ )	200 $\Omega$
Temperature coefficient (TC), 0°C up to +100°C	$3.85 \cdot 10^{-3} K^{-1}$
Tolerance class according to DIN EN 60751	F 0,6 (-50°C - +600°C)
Operating temperature range depending on lead material:	
HT-Pt	-50°C up to +850°C
Measurement current (DC) at 25°C	1 mA
Maximal permissible peak current (DC) at 25°C	3 mA
Insulation resistance	> 10 M $\Omega$
Self-heating at 0°C	< 0.5 K / mW
Thermal response time	
Flowing water ( $v = 0.2$ m/s)	$T_{0,5} = 0.07$ s, $T_{0,9} = 0.2$ s
Flowing air ( $v = 1$ m/s)	$T_{0,5} = 4$ s, $T_{0,9} = 10$ s
Resistance value [ $\Omega$ ] at	
Temperature	Tolerance F 0,6 / HT [ $\Omega$ ]
0°C	$200 \pm 0.48$
+100°C	$277.01 \pm 1.21$
$R_t$ measuring point	2 mm from wire end
Maximal Resistance Change at UCT 250 h	< 0.1 %

Specification	DIN EN 60751
Type	Film sensor
<b>Technology:</b> Advanced thin-film-technology - ceramic carrier with a micro-structured platinum layer and specific ceramic covering	
<b>Operating conditions:</b> Unprotected application only in dry environments without any contamination. Any compressive and tensile stresses of the leads have to be avoided.	
<b>Conformity:</b> 2011/65/EU Restriction of the use of Hazardous Substances Directive (RoHS)	
Dimensions [mm]	

## Functional performance

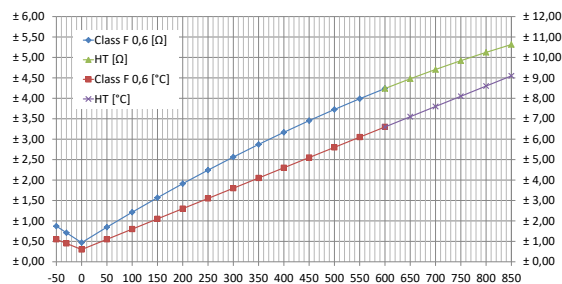

Picture 1: Resistance and temperature tolerances of Pt200

Temperature range from -50°C up to 0°C:

$$R_t = R_0 \cdot (1 + A \cdot t + B \cdot t^2 + C \cdot (t - 100^\circ\text{C}) \cdot t^3)$$

Temperature range from 0°C up to +600°C/+850°C:

$$R_t = R_0 \cdot (1 + A \cdot t + B \cdot t^2)$$

Tolerance class according to DIN EN 60751:

Class F 0,6: (-50°C - +600°C):  $\Delta t = \pm (0.6 + 0.01 \cdot |t|)$

Tolerance

HT: (-50°C - +850°C):  $\Delta t = \pm (0.6 + 0.01 \cdot |t|)$

Whereby:

$R_t$  ... Resistance [ $\Omega$ ] at temperature  $t$

$R_0$  ... Resistance [ $\Omega$ ] at 0°C

$t$  ... Temperature [°C]

$\Delta t$  ... Permissible temperature deviation at  $t$  [°C]

$$A = 3.9083 \cdot 10^{-3} \text{ } ^\circ\text{C}^{-1}$$

$$B = -5.775 \cdot 10^{-7} \text{ } ^\circ\text{C}^{-2}$$

$$C = -4.183 \cdot 10^{-12} \text{ } ^\circ\text{C}^{-4}$$

## Fields of application

- Industrial electronics
- Process engineering
- Building automation
- Automotive electronics
- Energy and environmental engineering
- Safety engineering

## Ordering example

Construction	Accuracy	Leads ( $\varnothing$ d x l [mm] lead material)	Operating temperature range [°C]
Pt200 FMC 1.5x3.5 HT850, TC 3850, cc	HT	0.15x5 HT-Pt	-50/+850

Other classes of accuracy, wire lengths, TC, e.g.  $3.77 \cdot 10^{-3} K^{-1}$  are available on request.