


Technical Data

Resistance at 0 °C (R ₀)	100 Ω
Temperature coefficient (0 °C up to +100 °C)	3.85 · 10 ⁻³ K ⁻¹
Tolerance class according to DIN EN 60751	F 0,3 (-50 °C - +500 °C)
Operating temperature range depending on lead material:	
AgPd5	-50 °C up to +400 °C
Measurement current (DC) at 25 °C	1.0 mA
Maximal permissible peak current (DC) at 25 °C	3.0 mA
Insulation resistance	> 10 MΩ
Self-heating at 0 °C	< 0.5 K / mW
Thermal response time	
Flowing water (v = 0.2 m/s)	T _{0,5} = 0.07s, T _{0,9} = 0.2s
Flowing air (v = 1 m/s)	T _{0,5} = 4 s, T _{0,9} = 10 s
Resistance value [Ω] at	
Temperature	Tolerance class F 0,3 [Ω]
0 °C	100 ± 0.12
+100 °C	138.51 ± 0.30

R _t measuring point	2 mm from wire end		
Maximal Resistance Change at UCT 250 h	< 0.1 %		
Specification	DIN EN 60751		
Type	Film sensor		
Technology: Advanced thin-film-technology (ceramic carrier with a structured platinum layer, covered with a passivating layer)			
Operating conditions: Unprotected application only in dry environments without any contamination			
Conformity: 2002/95/EC Restriction of the use of Hazardous Substances Directive (RoHS)			
Dimensions [mm]			
	FMC2105 2x2.3x1.3	Leads	AgPd5
H1 [mm]	1.3 ± 0.2	l [mm]	65 ± 1
H2 [mm]	0.65	d [mm]	0.25

Functional performance

according to DIN EN 60751

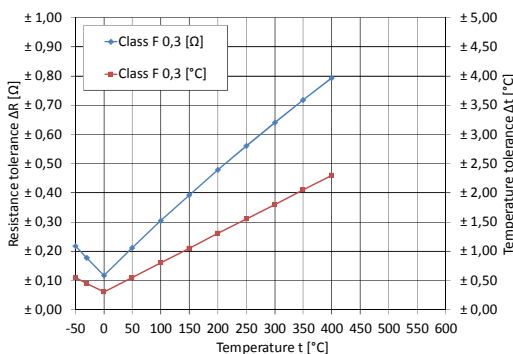

Picture 1: Resistance and temperature tolerances of Pt100 (Please note - the operating temperature range depends on lead material!)

Temperature range from -50 °C up to 0 °C:

$$R_t = R_0 \cdot (1 + A \cdot t + B \cdot t^2 + C \cdot (t - 100 \text{ °C}) \cdot t^3)$$

Temperature range from 0 °C up to +600 °C:

$$R_t = R_0 \cdot (1 + A \cdot t + B \cdot t^2)$$

Tolerance class according to DIN EN 60751:

Class F 0,3 (-50 °C - +500 °C): $\Delta t = \pm (0.3 + 0.005 \cdot |t|)$

(Please note: Operating temperature range depending on lead material AgPd5: -50 °C - +400 °C)

Whereby:

R_t ... Resistance [Ω] at temperature t

R₀ ... Resistance [Ω] at 0 °C

t ... Temperature [°C]

Δt ... Permissible temperature deviation at t [°C]

$$A = 3.9083 \cdot 10^{-3} \text{ °C}^{-1}$$

$$B = -5.775 \cdot 10^{-7} \text{ °C}^{-2}$$

$$C = -4.183 \cdot 10^{-12} \text{ °C}^{-4}$$



Fields of application

- Industrial electronics
- Building automation
- Automotive electronics
- Energy and environmental engineering
- Safety and medical engineering

Ordering example

Construction	Class of accuracy	Leads (ø d x l [mm] lead material)	Operating temperature range [°C]
FMC 2105 2x2,3x1.3	F 0,3	0.25x65 AgPd5	-50/+400

Other classes of accuracy and wire lengths are available on request.



UST Umweltsensortechnik GmbH is certified according to

