


# Platinum Temperature Sensor Pt1000 SMD 0805 fd

## Technical Data


Resistance at 0°C (R <sub>0</sub> )	1000 Ω
Temperature coefficient (0°C up to +100°C)	3.85 · 10 <sup>-3</sup> K <sup>-1</sup>
Tolerance class according to DIN EN 60751	F 0,3
Operating temperature range	-50 °C up to +150 °C
Measurement current (DC) at 25 °C	0.1 mA
Maximal permissible peak current (DC) at 25 °C	0.3 mA
Insulation resistance	> 10 MΩ
Self-heating at 0 °C	< 0.4 K / mW
Thermal response time	
Flowing water (v = 0.2 m/s)	T <sub>0,5</sub> = 0.2 s, T <sub>0,9</sub> = 0.5 s
Flowing air (v = 1 m/s)	T <sub>0,5</sub> = 4 s, T <sub>0,9</sub> = 10 s
Resistance value [Ω] at	
Temperature	Tolerance class
	F 0,3 [Ω]
0 °C	1000 ± 1.2
+100 °C	1385.1 ± 3
Maximal Resistance Change at UCT 250 h	< 0.1 %
Specification	DIN EN 60751

Type	Film sensor
Design	SMD 0805 (fd)
Application/Mounting	Only face down
<b>Technology:</b> Advanced thin-film-technology (ceramic carrier with a structured platinum layer, covered with a passivating layer)	
<b>Operating conditions:</b> Unprotected application only in dry environments without any contamination	
<b>Conformity:</b> 2011/65/EU - Restriction of the use of Hazardous Substances Directive (RoHS)	
Dimensions [mm]	

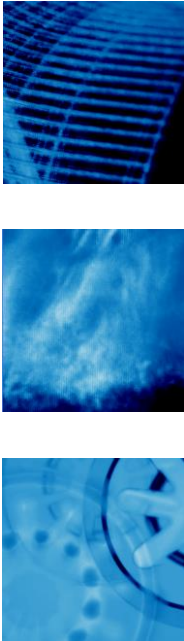

## Functional performance

according to DIN EN 60751

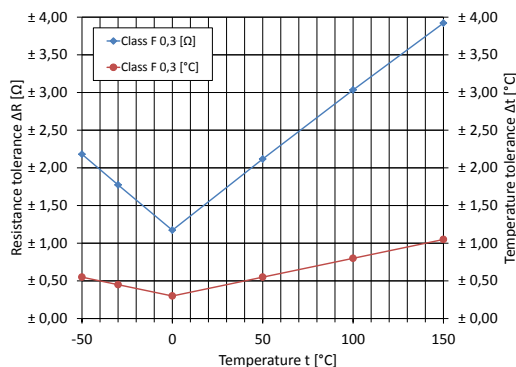

Picture 1: Resistance and temperature tolerances of Pt1000

Temperature range from -50 °C up to 0 °C:  
 $R_t = R_0 \cdot (1 + A \cdot t + B \cdot t^2 + C \cdot (t - 100 \text{ °C}) \cdot t^3)$

Temperature range from 0 °C up to +600 °C:  
 $R_t = R_0 \cdot (1 + A \cdot t + B \cdot t^2)$

Tolerance classes according to DIN EN 60751:  
 Class F 0,3 (-50 °C - +500 °C):  $\Delta t = \pm (0.3 + 0.005 \cdot |t|)$

**Please attend: operating temperature range of the Pt1000 SMD 0805 fd: -50 °C up to +150 °C!**

Whereby:

R<sub>t</sub> ... Resistance [Ω] at temperature t

R<sub>0</sub> ... Resistance [Ω] at 0 °C

t ... Temperature [°C]

Δt ... Permissible temperature deviation at t [°C]

A = 3.9083 · 10<sup>-3</sup> °C<sup>-1</sup>

B = -5.775 · 10<sup>-7</sup> °C<sup>-2</sup>

C = -4.183 · 10<sup>-12</sup> °C<sup>-4</sup>

## Fields of application

Application on PCB for

- Industrial electronics
- Building automation
- Automotive electronics
- Energy and environmental engineering
- Safety and medical engineering

## Ordering examples

Construction	Operating temperature range	Class of accuracy
Pt1000 SMD 0805 fd	-50 °C - +150 °C	F 0,3

Type of packaging on request.

Other classes of accuracy are available on request.

UST Umweltsensortechnik GmbH  
is certified according to

